


Microwave Sensor LED Tube T8



Specification

- Adjustable hold time: 5s, 30s, 1m, 3m, 5m, 10m, 20m, 30m, 60m
- Adjustable stand-by dimming level: 0%, 10%, 20%, 30%, 40%
- LED Tube end cap can be rotated by 90 degrees clockwise or counterclockwise
- Maximum detecting distance: up to 12 meters
- Photocell sensor version available

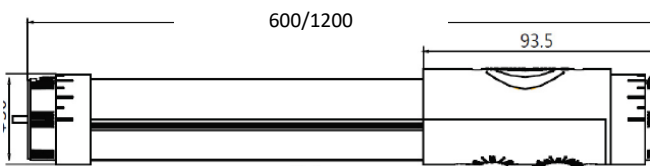

| Length | Model | Wattage | Lumen | CCT | CRI | Input voltage | PF |
|--------|---------|---------|---------|-------------------|-----|---------------|------|
| 0.6 m | TA0610S | 10W | 1100 lm | 3000K/4000K/6000K | >80 | AC100-240V | >0.9 |
| 0.9 m | TA0916S | 16W | 1650 lm | 3000K/4000K/6000K | >80 | AC100-240V | >0.9 |
| 1.2 m | TA1218S | 18W | 1980 lm | 3000K/4000K/6000K | >80 | AC100-240V | >0.9 |
| 1.5 m | TA1523S | 23W | 2530 lm | 3000K/4000K/6000K | >80 | AC100-240V | >0.9 |