LED Downlight Series

Specification

- Japan CITIZEN high efficiency COB LED
- Osram LED driver (non-dimmable version)
- Narrow beam angle 15° / 24° / 36° /**50°**
- Aluminium housing
- White trim
- 1-10V / DALI / TRIAC dimmable version available
- External constant current LED driver, PF>0.9

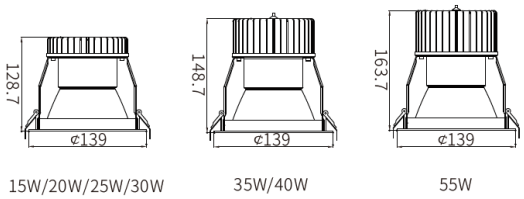

15W/20W/25W/30W　35W/40W　55W

15° 24° 36° 50°

Cut-out	Dimension	Model	Wattage	Lumen	CCT	CRI	Input voltage
Φ125	Φ139 x H129	ADLCB0415	15W	1500-1700 lm	3000K/4000K	>90	AC220-240V
Φ125	Φ139 x H129	ADLCB0420	20W	1950-2000 lm	3000K/4000K	>90	AC220-240V
Φ125	Φ139 x H129	ADLCB0425	25W	2300-2550 lm	3000K/4000K	>90	AC220-240V
Φ125	Φ139 x H129	ADLCB0430	30W	2600-2850 lm	3000K/4000K	>90	AC220-240V
Φ125	Φ139 x H149	ADLCB0435	35W	3150-3250 lm	3000K/4000K	>90	AC220-240V
Φ125	Φ139 x H149	ADLCB0440	40W	3500-3650 lm	3000K/4000K	>90	AC220-240V
Φ125	Φ139 x H164	ADLCB0455	55W	4900-5350 lm	3000K/4000K	>90	AC220-240V

LED Downlight Series

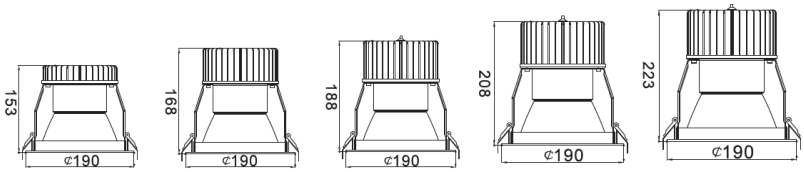

Specification

- Japan CITIZEN high efficiency COB LED
- Osram LED driver
- Narrow beam angle 25° / 40° /50°
- Aluminium housing
- White / black trim
- 1-10V / DALI / TRIAC dimmable version available
- External constant current LED driver, PF>0.95

25° 40° 50°

Cut-out	Dimension	Model	Wattage	Lumen	CCT	CRI	Input voltage
Φ175	Φ190 x H153	ADLCB0622	22W	2225-2330 lm	3000K/4000K	>82	AC220-240V
Φ175	Φ190 x H153	ADLCB0628	28W	2825-2940 lm	3000K/4000K	>82	AC220-240V
Φ175	Φ190 x H168	ADLCB0638	38W	3800-4368 lm	3000K/4000K	>82	AC220-240V
Φ175	Φ190 x H188	ADLCB0650	50W	5050-5480 lm	3000K/4000K	>82	AC220-240V
Φ175	Φ190 x H208	ADLCB0660	60W	5680-6268 lm	3000K/4000K	>82	AC220-240V
Φ175	Φ190 x H208	ADLCB0670	70W	5870-7266 lm	3000K/4000K	>82	AC220-240V
Φ175	Φ190 x H223	ADLCB0680	80W	6700-8300 lm	3000K/4000K	>82	AC220-240V

LED Downlight Series

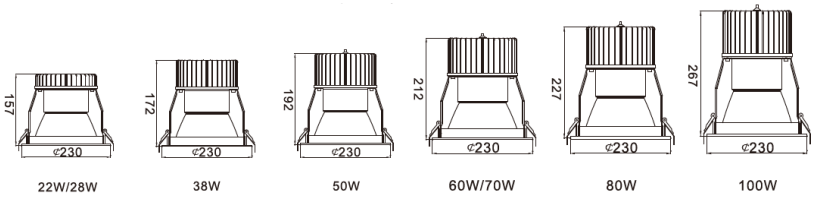

Specification

- Japan CITIZEN high efficiency COB LED
- Narrow beam angle 25° / 36° (70-100W) / 45° (22-60W) / 55°
- Aluminium housing
- White / black trim
- 1-10V / DALI / TRIAC dimmable version available
- External constant current LED driver, PF>0.95
- Comply with FSD PPA/104(A)
- SDCM<3

25° 36° 45° 55°

Cut-out	Dimension	Model	Wattage	Lumen	CCT	CRI	Input voltage
Φ210	Φ230 x H157	ADLCB0822	22W	2225-2330 lm	3000K/4000K	>82	AC220-240V
Φ210	Φ230 x H157	ADLCB0828	28W	2825-2940 lm	3000K/4000K	>82	AC220-240V
Φ210	Φ230 x H172	ADLCB0838	38W	3800-4368 lm	3000K/4000K	>82	AC220-240V
Φ210	Φ230 x H192	ADLCB0850	50W	5050-5480 lm	3000K/4000K	>82	AC220-240V
Φ210	Φ230 x H212	ADLCB0860	60W	5680-6268 lm	3000K/4000K	>82	AC220-240V
Φ210	Φ230 x H212	ADLCB0870	70W	5870-7266 lm	3000K/4000K	>82	AC220-240V

LED Downlight Series

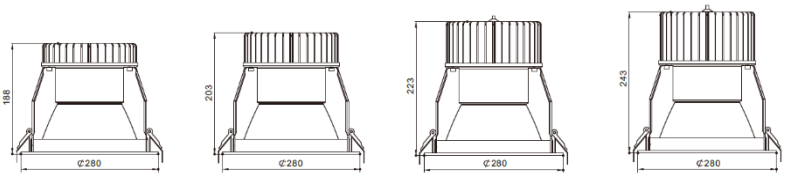

Specification

- Japan CITIZEN high efficiency COB LED
- Narrow beam angle 25° (32° for 70W) / 40°
- Aluminium housing
- White / black trim
- 1-10V / DALI / TRIAC dimmable version available
- External constant current LED driver, PF>0.95

Cut-out	Dimension	Model	Wattage	Lumen	CCT	CRI	Input voltage
Φ240-265	Φ280 x H188	ADLCB10022	22W	2225-2330 lm	3000K/4000K	>82	AC220-240V
Φ240-265	Φ280 x H188	ADLCB10028	28W	2825-2940 lm	3000K/4000K	>82	AC220-240V
Φ240-265	Φ280 x H203	ADLCB10038	38W	3800-4368 lm	3000K/4000K	>82	AC220-240V
Φ240-265	Φ280 x H223	ADLCB10050	50W	5050-5480 lm	3000K/4000K	>82	AC220-240V
Φ240-265	Φ280 x H243	ADLCB10060	60W	5680-6268 lm	3000K/4000K	>82	AC220-240V
Φ240-265	Φ280 x H243	ADLCB10070	70W	5870-7266 lm	3000K/4000K	>82	AC220-240V