


Flood Light Series



Specification

- High lumen efficiency Japan NICHIA LED
- Beam angle : 25° / 60° / 90° / 75° x 135°
- Die-casting aluminium housing
- High strength toughened glass, corrosion resistance
- Meanwell LED driver (80W - 200W)
- Optional for microwave motion detection version
- Optional for dimmable version

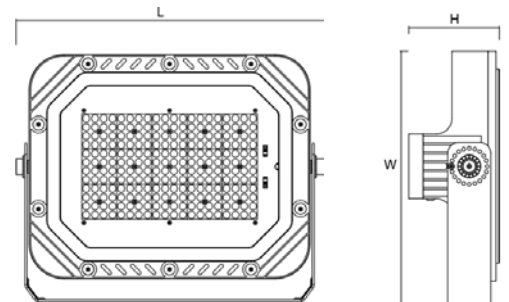

Model	Size(mm)	Wattage	Lumen	CCT	CRI	Input voltage	PF
FLK030	L185xW148xH69	30W	3600lm	3000K/4000K/5700K/6500K	>80	AC200-240V	>0.95
FLK050	L303xW246xH93	50W	6000lm	3000K/4000K/5700K/6500K	>80	AC200-240V	>0.95
FLK060	L303xW246xH93	60W	7200lm	3000K/4000K/5700K/6500K	>80	AC200-240V	>0.95
FLK080	L385xW309xH110	80W	9600lm	3000K/4000K/5700K/6500K	>80	AC200-240V	>0.95
FLK100	L385xW309xH110	100W	12000lm	3000K/4000K/5700K/6500K	>80	AC200-240V	>0.95
FLK150	L437xW352xH126	150W	18000lm	3000K/4000K/5700K/6500K	>80	AC200-240V	>0.95
FLK200	L437xW352xH126	200W	30000lm	3000K/4000K/5700K/6500K	>80	AC200-240V	>0.95