

SP3535-D08

luminaire specification

SP3535-D08

SP3535 stylish lighting system, through the sublimation from straight line to curve, transformation from 2D to 3D, linear lighting is brought with a brand-new revolutionary experience. The basic modules can constitute standard circular luminaires with the diameter of 0.8m/1.5m/3.0m for independent application. Multiple light emitting directions are optional: lighting downward, lighting outward and lighting inward. The light emitting modes are optional according to the scenes as well, so as to create different atmospheres.




- Φ 0.8M, circular luminaires of lighting downward;
- High quality surface treatment, three optional colors of black, white and silver;
- Adopt silicone flexible diffuser, producing homogenous & soft lighting;
- Pendant cable and wire in one, beautiful overall effect;
- Two installation ways: pendant and surface mounted.

Optical & electronic data


Model	Size	CCT	Flux (lm)	CRI	Beam angle	Input voltage	Dimming	PF	Power (w)
SP3535-D08 (including power supply)	Φ800mm, lighting downward, 360° luminaires	1900K	1190LM	>80	120°	100~265VAC 50/60Hz	Non dimming	>0.5	50W
		2300K	1250LM						
		2700K	1320LM						
		3000K	1390LM						
		3500K	1460LM						
		4000K	1540LM						
		5000K	1620LM						
SP3535-D08 (no power supply)	Φ800mm, lighting downward, 360° luminaires	1900K	1190LM	>80	120°	DC24V	/	/	43W
		2300K	1250LM						
		2700K	1320LM						
		3000K	1390LM						
		3500K	1460LM						
		4000K	1540LM						
		5000K	1620LM						
6000K	1540LM								

Remark :

- 1, the tolerance of output data can be vary up to 10% ;
- 2, the output data is typical value;

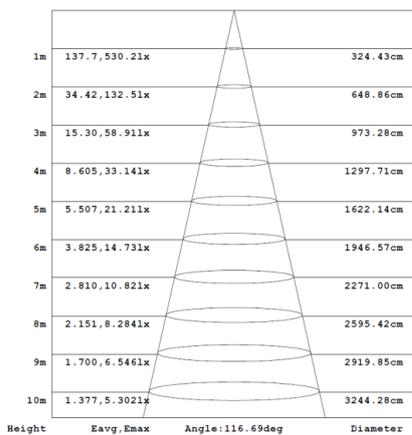


AAI FIGURE

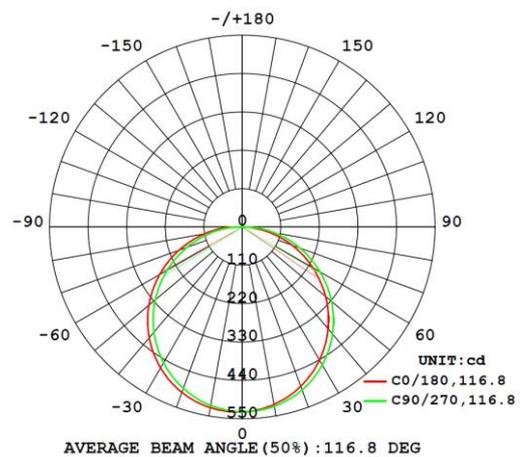

Luminous intensity distribution

Packing:

The whole package

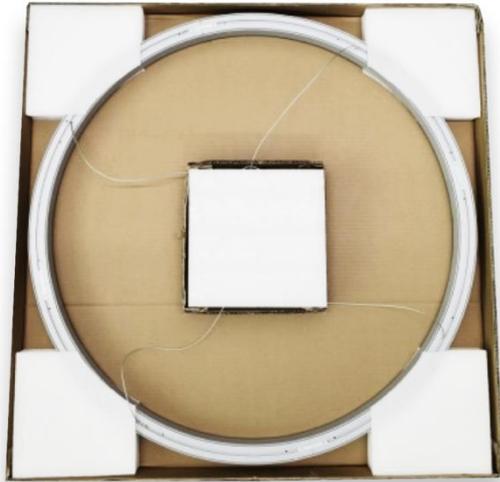

Model	Type	Demension (individual package)	Pcs/bundle	NW (Kg)	GW (Kg)	Demension (whole package)	CBM (m ³)
SP3535-D08 (pendant/ including power supply)	Box	912*912*60mm	1	3.3	4.7	912*912*60mm	0.05
SP3535-D08 (pendant/ no power supply)				3.09	4.49		
SP3535-D08 (surface mounted/ including power supply)				2.26	3.66		
SP3535-D08 (surface mounted/ no power supply)				2.05	3.45		

Attentions :

- Please install the product in the right environment as much as possible ;
- Please be careful during operation. Do not touch the AC power supply in case of electric shock ;
- Check the current through the circuit, such as the surge occurs when press the switch does not exceed the maximum rated current, please insert the appropriate protection circuit ;
- This product is sensitive to static electricity, and please special attention. In particular, it will damage the product when the static electricity is more than absolute maximum rated current and voltage, please make a countermeasures to avoid the damage of the static electricity and surge when using the product.