


Specification

- High efficiency 2835 SMD
- 98 LEDs/meter
- Very flexible PCB board
- 5 meters/roll
- 8mm width
- Operation temperature -20°C~45°C

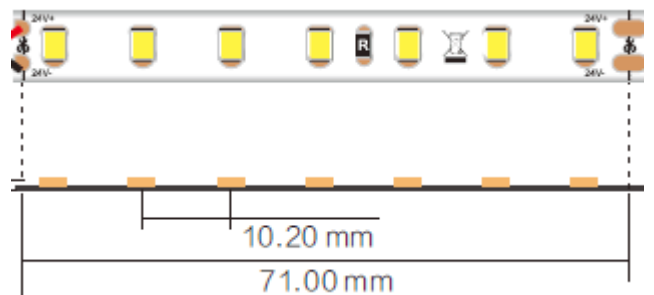

Model	Wattage	Lumen	CCT	CRI	Input voltage	Protection Grade
S283598AW	11W/m	1130-1400lm/m	2700K/3000K/4000K/6000K	>80/>90	DC24V	IP33 / IP55 / IP65 / IP67