


Microwave Sensor LED Tube T5



Specification

- Adjustable hold time: 5s, 30s, 1m, 3m, 5m, 10m, 20m, 30m, 60m
- Adjustable stand-by dimming level: 0%, 10%, 20%, 30%, 40%
- LED Tube end cap can be rotated by 90 degrees clockwise or counterclockwise
- Maximum detecting distance: up to 12 meters
- Photocell sensor version available

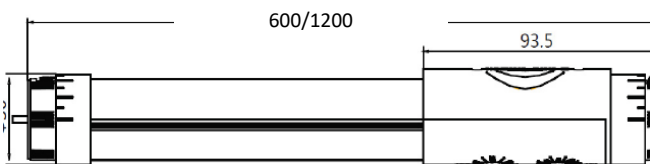

Length	Model	Wattage	Lumen	CCT	CRI	Input voltage	PF
0.6 m	TA0610S	10W	1100 lm	3000K/4000K/6000K	>80	AC100-240V	>0.9
0.9 m	TA0916S	16W	1650 lm	3000K/4000K/6000K	>80	AC100-240V	>0.9
1.2 m	TA1218S	18W	1980 lm	3000K/4000K/6000K	>80	AC100-240V	>0.9
1.5 m	TA1523S	23W	2530 lm	3000K/4000K/6000K	>80	AC100-240V	>0.9