

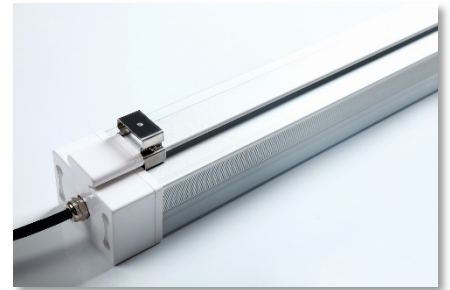


# Tri-proof LED batten

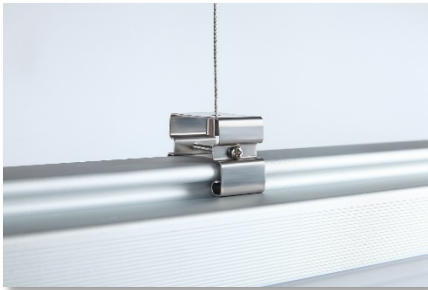

## Specification

- SMD LED
- Aluminium housing
- PC diffuser
- Built-in isolated LED driver
- Lightening-protection technology
- **IK07** shock-proof


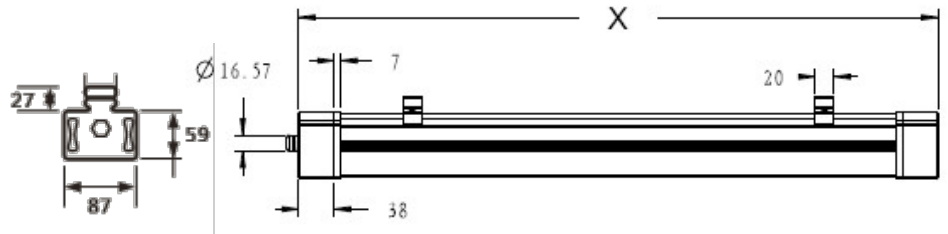


Fixture Produced by




Length (X)	Model	Wattage	Lumen	CCT	CRI	Input voltage	PF
350mm	TPL0320	20W	2000lm	3000K/4000K/5000K/6500K	80	AC100-240V	0.96
662mm	TPL0620	20W	2000lm	3000K/4000K/5000K/6500K	80	AC100-240V	0.96
1562mm	TPL1535	35W	3500lm	3000K/4000K/5000K/6500K	80	AC100-240V	0.96

# Tri-proof LED batten

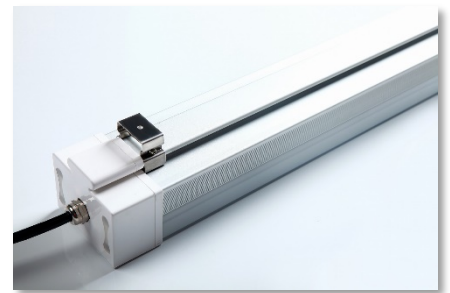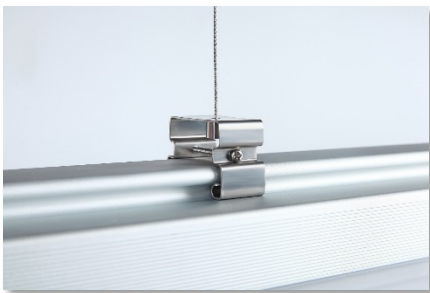

## Specification

- SMD LED
- Aluminium housing
- PC diffuser
- Built-in isolated LED driver
- Lightening-protection technology
- **IK07** shock-proof

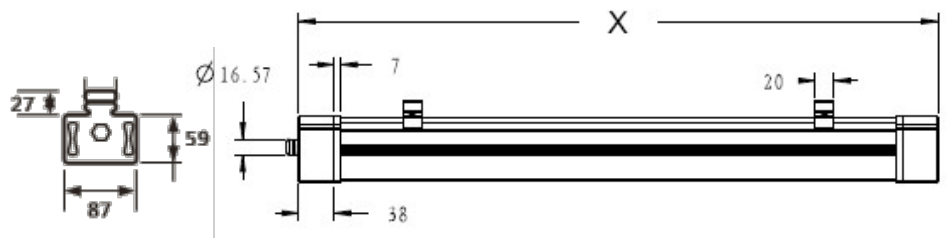

Fixture Produced by



Length (X)	Model	Wattage	Lumen	CCT	CRI	Input voltage	PF
662mm	TPL0610	10W	1000lm	3000K/4000K/5000K/6500K	80	AC100-240V	0.96
962mm	TPL0914	14W	2000lm	3000K/4000K/5000K/6500K	80	AC100-240V	0.96
1262mm	TPL1218	18W	3500lm	3000K/4000K/5000K/6500K	80	AC100-240V	0.96