


LED T8 Recessed Mounted Set



Specification

- Steel housing with white powder coated
- Opal PMMA or clear prismatic PMMA available
- Recessed mounting, suitable for different ceiling design
- Rustproof, designed for clean area
- Suitable for office, school, shopping mall, supermarket and other indoor place

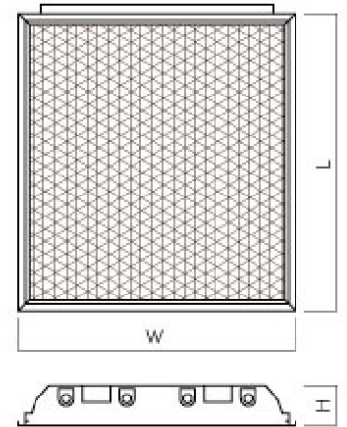

Size (mm)	Cut-out (mm)	Model	Wattage	Lumen	CCT	CRI	Input voltage
597x297x85	585x285	VR071220NDR	2x10W	2000lm	3000K/4000K/5000K/6000K	80	AC200-240V
597x597x85	585x585	VR072230NTR	3x10W	3000lm	3000K/4000K/5000K/6000K	80	AC200-240V
597x597x85	585x585	VR072240NQR	4x10W	4000lm	3000K/4000K/5000K/6000K	80	AC200-240V
1197x297x85	1185x285	VR071436NDR	2x18W	3600lm	3000K/4000K/5000K/6000K	80	AC200-240V
1197x597x85	1185x585	VR072454NTR	3x18W	5400lm	3000K/4000K/5000K/6000K	80	AC200-240V
1197x597x85	1185x585	VR072472NQR	4x18W	7200lm	3000K/4000K/5000K/6000K	80	AC200-240V