

# LED T8 Tube



With **Internal Emergency Battery**

## Specification

- G13 lamp socket
- Emergency duration: 2.5-3 hours
- Internal Lithium iron phosphate battery
- Operating temperature: 0-60° C
- 10% emergency lighting
- Design with test button and charging indicator
- Aluminium and PC housing



## Switch control


- Switch on, the general lighting working
- Switch off, the emergency lighting working
- Switch on, the general lighting working
- Switch off, the tube is off
- Switch on and off soon, light dim

## Test button

- Test the emergency battery function or not

## Charging indicator

- Red - charging
- Green - full

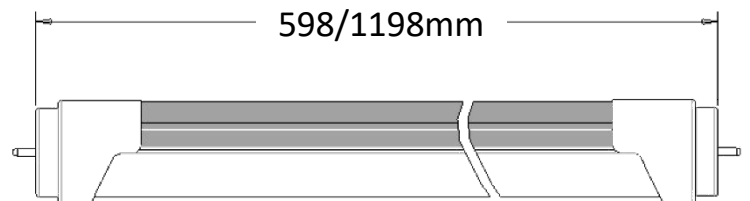

Length	Model	Wattage	Charging	Lumen	CCT	CRI	Input voltage	PF
0.6 m	LVTPV0610E	10W	11W	900lm	3000K/4000K/5000K/6000K	>80	<b>AC24V</b>	>0.95
1.2 m	LVTPV1222E	22W	24W	2000lm	3000K/4000K/5000K/6000K	>80	<b>AC24V</b>	>0.95